



SPECIFICATION CONTROL DRAWING

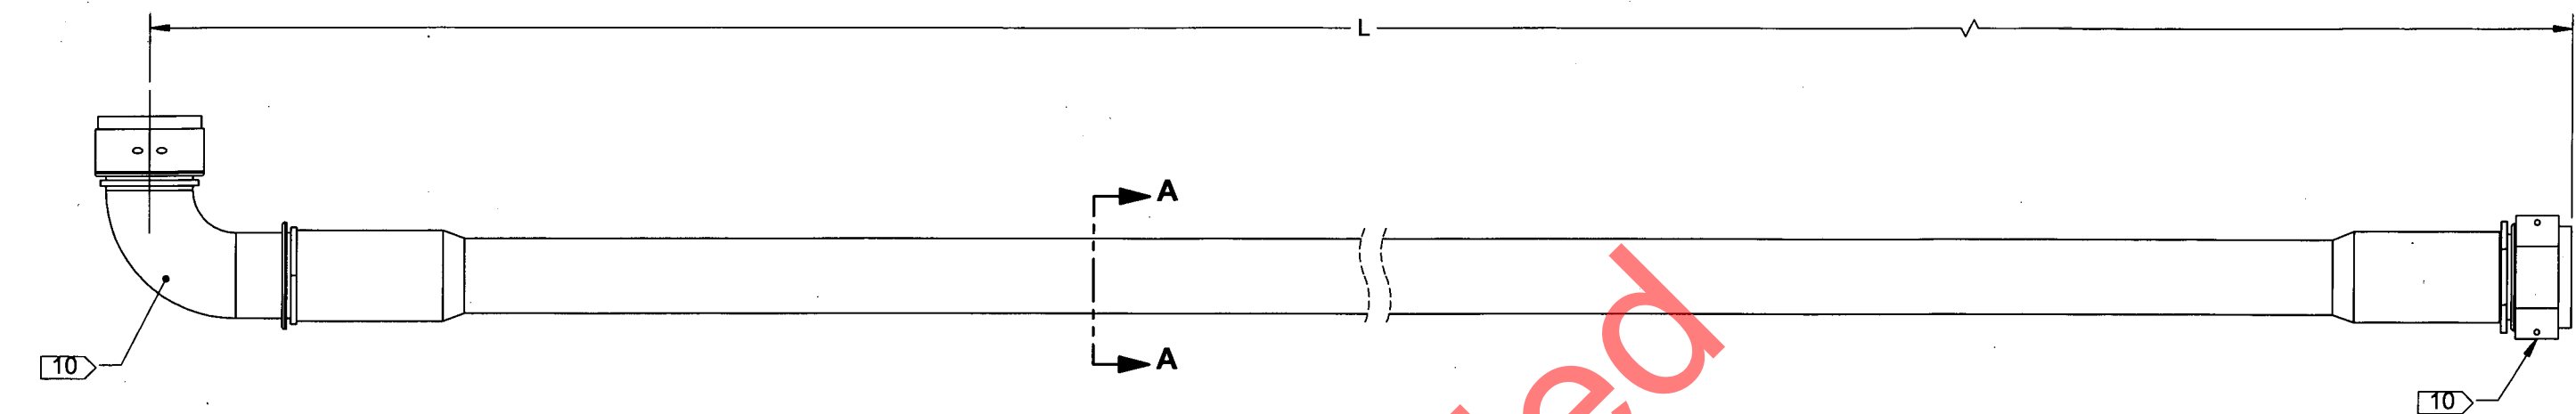

D4943-XX FLEX HOSE

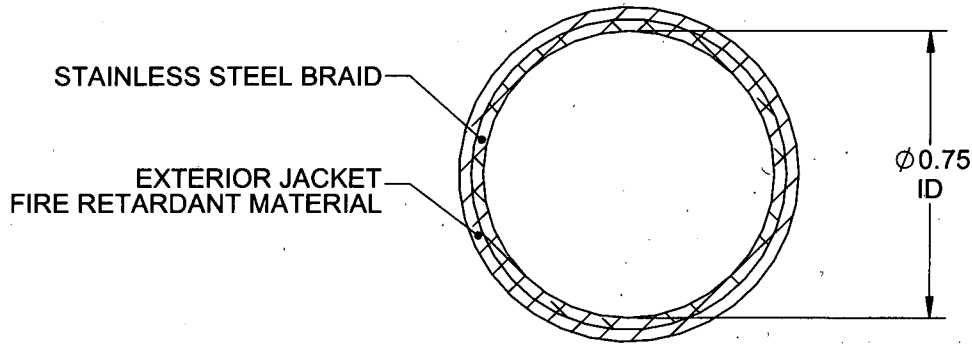

SECTION A-A
TUBE BUILD-UP

DART P/N	L	VENDOR	VENDOR P/N	WEIGHT
D4943-1	40.00	AERO-FLEX	12EAS12S-03900F	1.3 lbs



- NOTES:
- 1) MATERIAL: BRAID: STAINLESS STEEL PER MANUFACTURER
JACKET: FIRE RETARDANT MATERIAL PER MANUFACTURER
END FITTING: STAINLESS STEEL PER MANUFACTURER
 - 2) FINISH: N/A
 - 3) TOLERANCES: N/A
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: N/A
 - 6) IDENTIFICATION: PER QSI 044 6.1.
 - 7) WEIGHT: SEE TABLE
 - 8) MAXIMUM OPERATING TEMPERATURE 500°F
 - 9) MAXIMUM OPERATING PRESSURE 120 PSI
 - 10) END FITTING REQUIREMENTS: FEMALE, 3/4, 37° JIC FITTING (THREAD 1-1/16 UN), WITH LOCKWIRE HOLES

RELEASED
2014-05-50

APPROVED	DESIGN	AS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
	DRAWN	AJS		
	CHECKED	AP	DRAWING NO. REV. B	
	MFG. APPR.	JLM	D4943 SHEET 1 OF 1	
	APPROVED	MP	TITLE SCALE	
	DE APPR.	DS	FLEX HOSE NTS	
	DATE	14.03.14	COPYRIGHT © 2013 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	